

REVISED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)


PCT

(10) International Publication Number
WO 2004/028722 A1

- (51) International Patent Classification⁷: **B21D 53/28**, F16H 48/08
- (72) Inventors; and
(75) Inventors/Applicants (*for US only*): **LINDSAY, Alan** [CA/CA]; 62 Invermage Drive, Scarborough, Ontario M1C 3M4 (CA). **LI, Jianwen** [CN/CA]; 62 Salem Avenue, Toronto, Ontario M6H 3C1 (CA).
- (21) International Application Number:
PCT/CA2003/001486
- (22) International Filing Date:
29 September 2003 (29.09.2003)
- (74) Agents: **IMAI, Jeffrey, T. et al.**; Magna International Inc., 337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/414,233 , 27 September 2002 (27.09.2002) US
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, VZ, VC, VN, YU, ZA, ZM, ZW.
- (71) Applicant (*for all designated States except US*): **TESMA INTERNATIONAL INC.** [CA/CA]; 1000 Tesma Way, Concord, Ontario L4K 5R8 (CA).

[Continued on next page]

(54) Title: COLD FORMED DIFFERENTIAL HOUSING WITH INTEGRATED RING GEAR

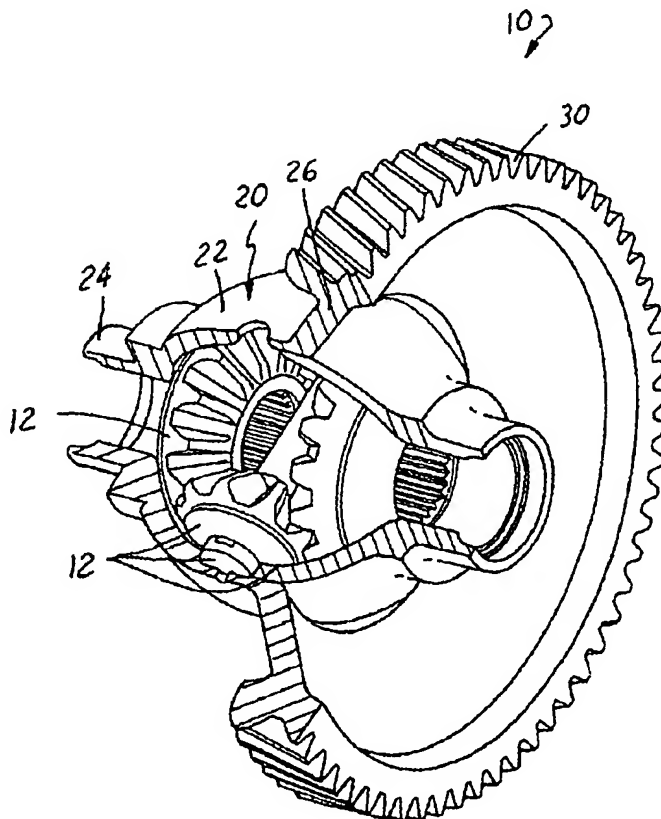

(57) Abstract: A method for making a differential housing (20) having a ring gear (30) integrally formed therein includes the steps of providing a differential housing having an annular rim integrally preformed therein; supporting the differential housing between upper and lower halves of a rotatable holding tool such that the annular rim extends radially outwardly from the holding tool for movement therewith; providing a thickening tool having a tool surface engagable with the annular rim during rotation of the holding tool to form a thickened lip; and providing a gear forming tool engagable with the thickened lip during rotation of the holding tool, whereby a plurality of teeth are formed along the lip to form the ring gear.

WO 2004/028722 A1



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) **Date of publication of the revised international search report:** 22 July 2004

(15) **Information about Correction:**
see PCT Gazette No. 30/2004 of 22 July 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

COPIED VERSION

International Application No

PCT/CA 03/01486

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B21D53/28 F16H48/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B21D F16H B21H B21K B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

PAJ, EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 011, no. 352 (M-643), 18 November 1987 (1987-11-18) & JP 62 132055 A (TSUNODA TEKKOSHO KK), 15 June 1987 (1987-06-15) abstract	1,10, 13-17
X	GB 786 593 A (CIE DE PONT-A-MOUSSON) 20 November 1957 (1957-11-20) page 1, line 69-71; figure 1	1,10, 13-17
A	EP 0 979 959 A (FORD GLOBAL TECH INC) 16 February 2000 (2000-02-16) figures	1-17

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 April 2004

Date of mailing of the international search report

14. 04. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Meritano, L

INTERNATIONAL SEARCH REPORT

on patent family members

International Application No






PCT/CA 03/01486

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 62132055	A	15-06-1987	NONE	
GB 786593	A	20-11-1957	NONE	
EP 0979959	A	16-02-2000	US 6061907 A DE 69901373 D1 DE 69901373 T2 EP 0979959 A1	16-05-2000 06-06-2002 10-10-2002 16-02-2000




COLD FORMED DIFFERENTIAL HOUSING WITH INTEGRATED RING GEAR

Patent number: WO2004028722
Publication date: 2004-04-08
Inventor: LINDSAY ALAN (CA); LI JIANWEN (CA)
Applicant: TESMA INT INC (CA); LINDSAY ALAN (CA); LI JIANWEN (CA)
Classification:
- **international:** (IPC1-7): B21D53/28; F16H1/40
- **european:** B21D53/28; B21K1/26; B21K1/30; B21K21/06; F16H1/40
Application number: WO2003CA01486 20030929
Priority number(s): US20020414233P 20020927

Also published as:

 WO2004028722 (A1)
 EP1545810 (A1)
 EP1545810 (A1)
 CA2499054 (A1)
 AU2003273388 (A1)


Cited documents:

 GB786593
 EP0979959
 JP62132055

Report a data error here

Abstract of WO2004028722

A method for making a differential housing (20) having a ring gear (30) integrally formed therein includes the steps of providing a differential housing having an annular rim integrally preformed therein; supporting the differential housing between upper and lower halves of a rotatable holding tool such that the annular rim extends radially outwardly from the holding tool for movement therewith; providing a thickening tool having a tool surface engagable with the annular rim during rotation of the holding tool to form a thickened lip; and providing a gear forming tool engagable with the thickened lip during rotation of the holding tool, whereby a plurality of teeth are formed along the lip to form the ring gear.

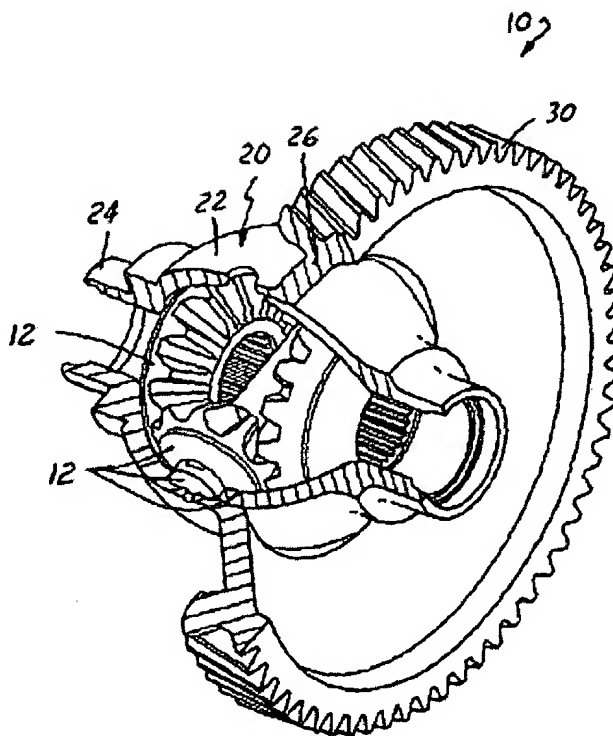

Data supplied from the esp@cenet database - Worldwide

COLD FORMED DIFFERENTIAL HOUSING WITH INTEGRATED RING GEARDescription of **WO2004028722**

<Desc/Cims Page number 1>

COLD FORMED DIFFERENTIAL HOUSING WITH

INTEGRATED RING GEAR Field of the Invention [0001] The invention relates to transaxles for an automotive vehicle, and more particularly, to a differential housing with an integrated ring gear and a method of forming the housing with the ring gear integrated therewith.

Description of the Related Art [0002] Differential mechanisms are widely used in drive axles in automobiles for transmitting torque from an engine driven transmission output to left and right axle shafts. Wheels are typically secured to the ends of the axle shafts. The differential mechanism typically includes a plurality of gears for allowing the left and right axle shafts to rotate at different speeds while still transmitting torque to the wheels driven by the axle shafts.

[0003] Conventional differential mechanisms include an outer housing and a separate ring gear fixedly secured to the outer housing. Producing separate housings and rings gears and later interconnecting the ring gears to the housings requires numerous machining and welding operations. Further, the heat generated during the welding operations tends to distort the housing and the ring gear.

[0004] Accordingly, it remains desirable to have a method of forming a differential housing having a ring gear integrally formed therein without the need to weld separate a housing and a ring gear.

SUMMARY OF THE INVENTION [0005] According to one aspect of the invention, a method of making a differential housing having a ring gear integrally formed therein is provided. The method

<Desc/Cims Page number 2>

includes the steps of providing a housing blank having an annular rim integrally pre- formed therein; supporting the housing blank in a rotatable holding tool so that the annular rim extends radially outwardly from the holding tool for rotation therewith; rotating the holding tool; providing a thickening tool for engaging the annular rim during rotation of the holding tool, whereby the annular rim is plastically deformed to form a lip; and providing a gear forming tool for engaging the lip during rotation of the holding tool, whereby a plurality of teeth are formed along the lip to form the ring gear. Also disclosed is a differential housing having an integrally formed ring gear.

BRIEF DESCRIPTION OF THE DRAWINGS [0006] Advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein: [0007] Figure 1 is a perspective view of a differential assembly according to one aspect of the invention; [0008] Figure 2 is a cross sectional view of a die tool and housing blank formed in the die tool according to one aspect of the invention; [0009] Figure 3 is a cross sectional view of a holding tool and a thickening tool for forming a thickened lip in the housing blank; [0010] Figure 4 is a cross sectional view of the holding tool and a second thickening tool; [0011] Figure 5 is a cross sectional view of the holding tool and a gear forming tool for forming the ring gear from the thickened lip;

<Desc/Cims Page number 3>

[0012] Figure 6 is a cross sectional view of the die tool according to a second embodiment of the invention; and [0013] Figure 7 is a cross sectional view of the die tool according to a third embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT [0014] Referring to the figures, a differential assembly for a transaxle in an automotive vehicle is generally indicated at 10 in Figure 1. The differential assembly 10 includes a plurality of pinion gears 12 matingly engaged, as known by those of

ordinary skill in the art, for transmitting torque from a transmission output (not shown) to left and right axle shafts and for allowing the left and right axle shafts to rotate at different speeds. The pinion gears are operatively supported by a differential housing 20. The housing 20 includes a generally bell shaped body 22 extending between a generally cylindrical first end 24 and an opposite annular second end 26. A ring gear 30 is integrally formed in the second end 26 of the housing 20. A method of integrally forming the ring gear 30 into the second end 26 of the housing is described in detail below.

[0015] Referring to Figure 2, a mandrel or lower die 40 is provided having a pre-shaped, positive lower tool surface 42. An upper die 50 is provided having a pre-shaped upper tool surface 52. The upper tool surface 52 is generally complementary to the lower tool surface 42. The upper die 50 is forcibly movable relative to the lower die 40 between an open position, as shown in Figure 2, and a closed position against the lower die 40, by any suitable means, such as a hydraulic press assembly.

In the closed position, a cavity 58 is defined between the tool surfaces 42,52 of the

<Desc/Cims Page number 4>

lower 40 and upper 50 dies that generally define the desired shape of the housing 20.

In the open position, the lower die 40 is exposed to allow the placement or removal of a housing blank 60.

[0016] While the upper die 50 is in the open position, a pre-formed housing blank 60 is placed onto the lower tool surface 42. The upper die 50 is forcibly moved to the closed position, whereby the housing blank 60 is compressed between the lower 42 and upper 52 tool surfaces. The housing blank 60 is flow or cold formed to retain the general shape of the cavity 58. An annular rim 62 is formed in the housing blank 60 defining a rim axis 61.

[0017] Referring to Figures 3 and 4, a first holding tool 70 having a generally cylindrical outer peripheral surface 71 is provided. The first holding tool 70 includes upper 72 and lower 74 holding members. The first holding tool 70 is rotatably supported by external support means (not shown) for rotation about a first rotary axis 75. The upper 72 and lower 74 holding members have complementary upper 76 and lower 78 clamping surfaces, respectively, adapted for nestingly supporting the housing blank 60 therebetween. The upper 76 and lower 78 clamping surfaces each extend between the outer peripheral surface 71. The housing blank 60 is placed into and clamped between the upper 76 and lower 78 clamping surfaces such that the rim axis 61 is aligned with the first rotary axis 75 and the rim 62 protrudes radially beyond the outer peripheral surface 71.

[0018] A thickening tool 80 having a forming surface 82 for plastically deforming the rim 62 is provided and rotatably supported by external support means (not shown) for rotation about a second rotary axis 83.

<Desc/Cims Page number 5>

[0019] The first holding tool 70 and thickening tool 80 are rotated in opposite directions about their respective first 75 and second 83 rotary axes by any suitable means, such as an electric motor, at preselected fixed or variable speeds. The housing blank 60, clamped between the upper 76 and lower 78 clamping surfaces, rotates with the holding tool 70. The thickening tool 80 is displaced toward the first holding tool 70 by any suitable means, such as a hydraulic cylinder, so that the forming surface 82 frictionally engages the rim 62. The forming surface 82 is forcibly held against the rim 62 until the outer periphery of the rim 62 is plastically deformed into a thickened or bulbous annular lip 84, as shown in Figure 3. The forming surface 82 may be held against the rim 62 continuously in a single pass or in successive passes until a desired shape of the lip 84 is achieved. Second 88 or third (not shown) thickening tools may be utilized in succession until the desired shape of the lip 84 is achieved, as shown in Figure 4. The housing blank 60 is removed from between the upper 76 and lower 78 clamping surfaces.

[0020] Referring to Figure 5, a second holding tool 90 having a generally cylindrical outer peripheral surface 91 is provided. The second holding tool 90 includes upper 92 and lower 94 holding members. The second holding tool 90 is rotatably supported by external support means (not shown) for rotation about a third rotary axis 95. The upper 92 and lower 94 holding members have complementary upper 96 and lower 98 clamping surfaces, respectively adapted for nestingly supporting the housing blank 60 therebetween.

The upper 96 and lower 98 clamping surfaces each extend between the outer peripheral surface 91 of the second holding tool 90. The housing blank 60 is placed into and clamped between the upper 96 and lower 98 clamping surfaces such

<Desc/Cims Page number 6>

that the rim axis 61 is aligned with the third rotary axis 95 and the bulbous lip 84 protrudes radially beyond the outer peripheral surface 91.

[0021] A gear forming tool 100 having a gear forming surface 102 for forming the teeth of the rim gear 30 is provided and rotatably supported by external support means (not shown) for rotation about a fourth rotary axis 104.

[0022] The second holding tool 90 and the gear forming tool 100 are rotated in opposite directions about their respective third 95 and fourth 104 rotary axes by any suitable means, such as an electric motor, at preselected fixed or variable speeds. The housing blank 60, clamped between the upper 96 and lower 98 clamping surfaces, rotates with the second holding tool 90. The gear forming tool 100 is displaced toward the second holding tool 90 by any suitable means, such as a hydraulic cylinder, so that the gear forming surface 102 frictionally engages the lip 84. The gear forming surface 102 is forcibly held against the lip 84. The gear forming surface 102 cuts and plastically deforms the lip 84 to form the teeth of the rim gear 30. The gear forming surface 102 may be applied to the lip 84 in successive steps until a final desired shape for the teeth of the rim gear 30 is achieved. Thus, a rim gear 30 is integrally formed in the housing 20 without welding and with minimal material loss.

[0023] An alternative method of integrally forming the rim gear 30 in the housing 20 is shown in Figure 6. The upper die 150 is forcibly moved to the closed position, whereby the housing blank 160 is compressed between the lower 142 and upper 152 tool surfaces of the lower 140 and upper 150 dies. The housing blank 160 is flow or cold formed to retain the general shape of the cavity 158 formed between the lower 142 and upper 152 tool surfaces in the closed position. A thickened lip 184 is formed in the housing blank 160 without the intermediate steps of utilizing successive

<Desc/Cims Page number 7>

thickening tools. The rim gear 30 is cut and formed from the thickened lip 184, as discussed.

[0024] As best shown in Figure 7 excess material 185 may be subsequently removed from the thickened lip 184 prior to forming the teeth of the rim gear 30 to achieve a desired shape of the lip 184 not possible with flow or cold forming alone.

[0025] The invention has been described in an illustrative manner, and it is to be understood that the terminology, which has been used, is intended to be in the nature of words of description rather than of limitation.

[0026] Many modification and variations of the present invention are possible in light of the above teachings. It is, therefore, to be understood that within the scope of the appended claims, the invention may be practiced other than as specifically described.

Data supplied from the esp@cenet database - Worldwide

